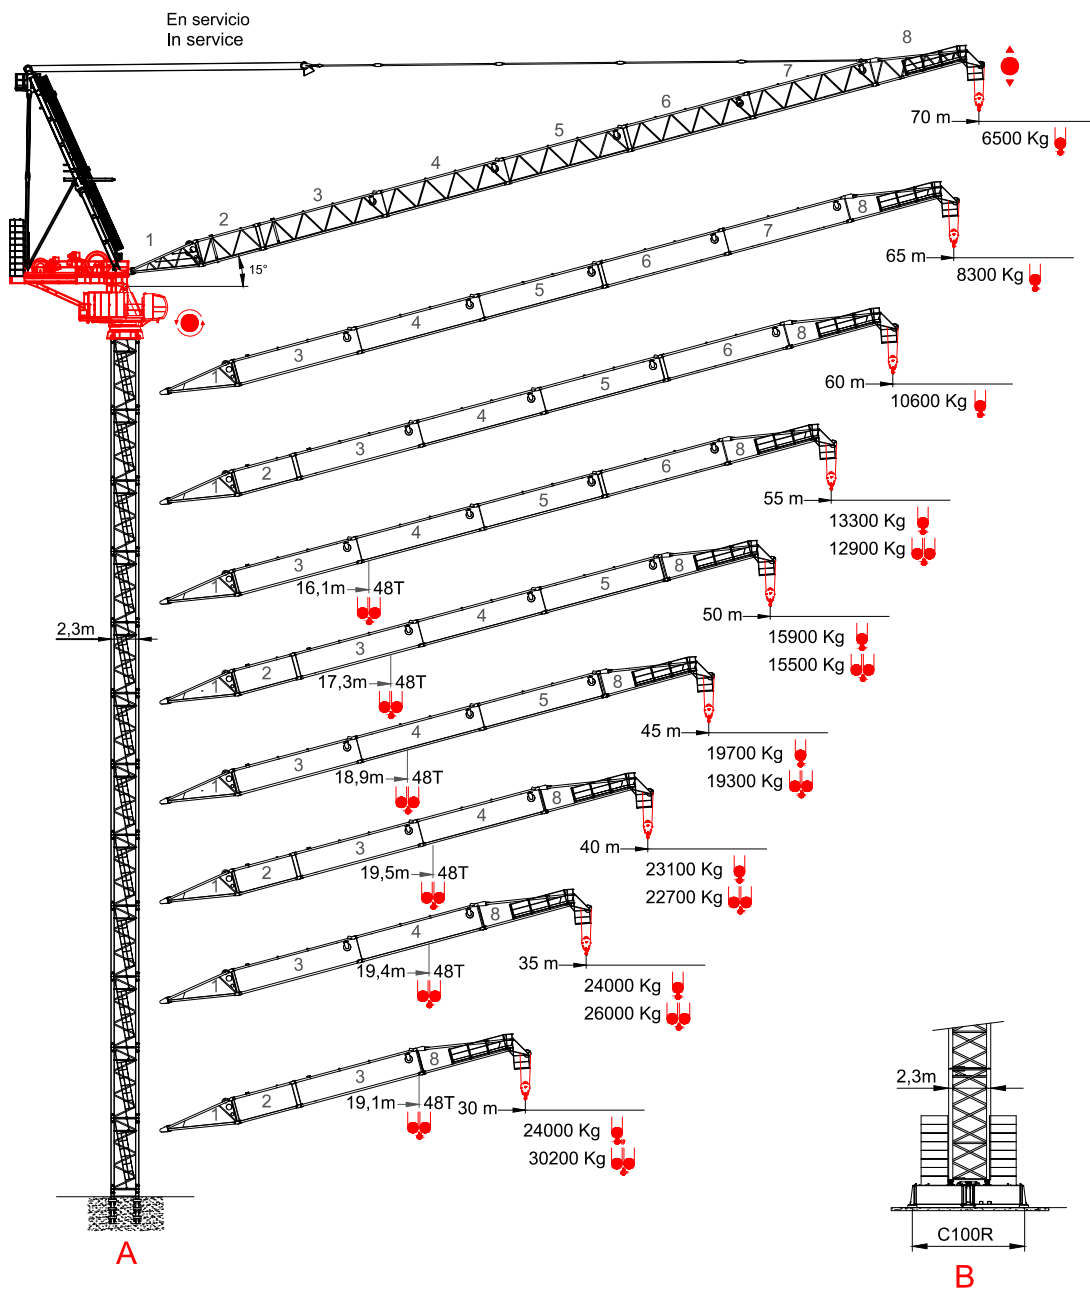




A

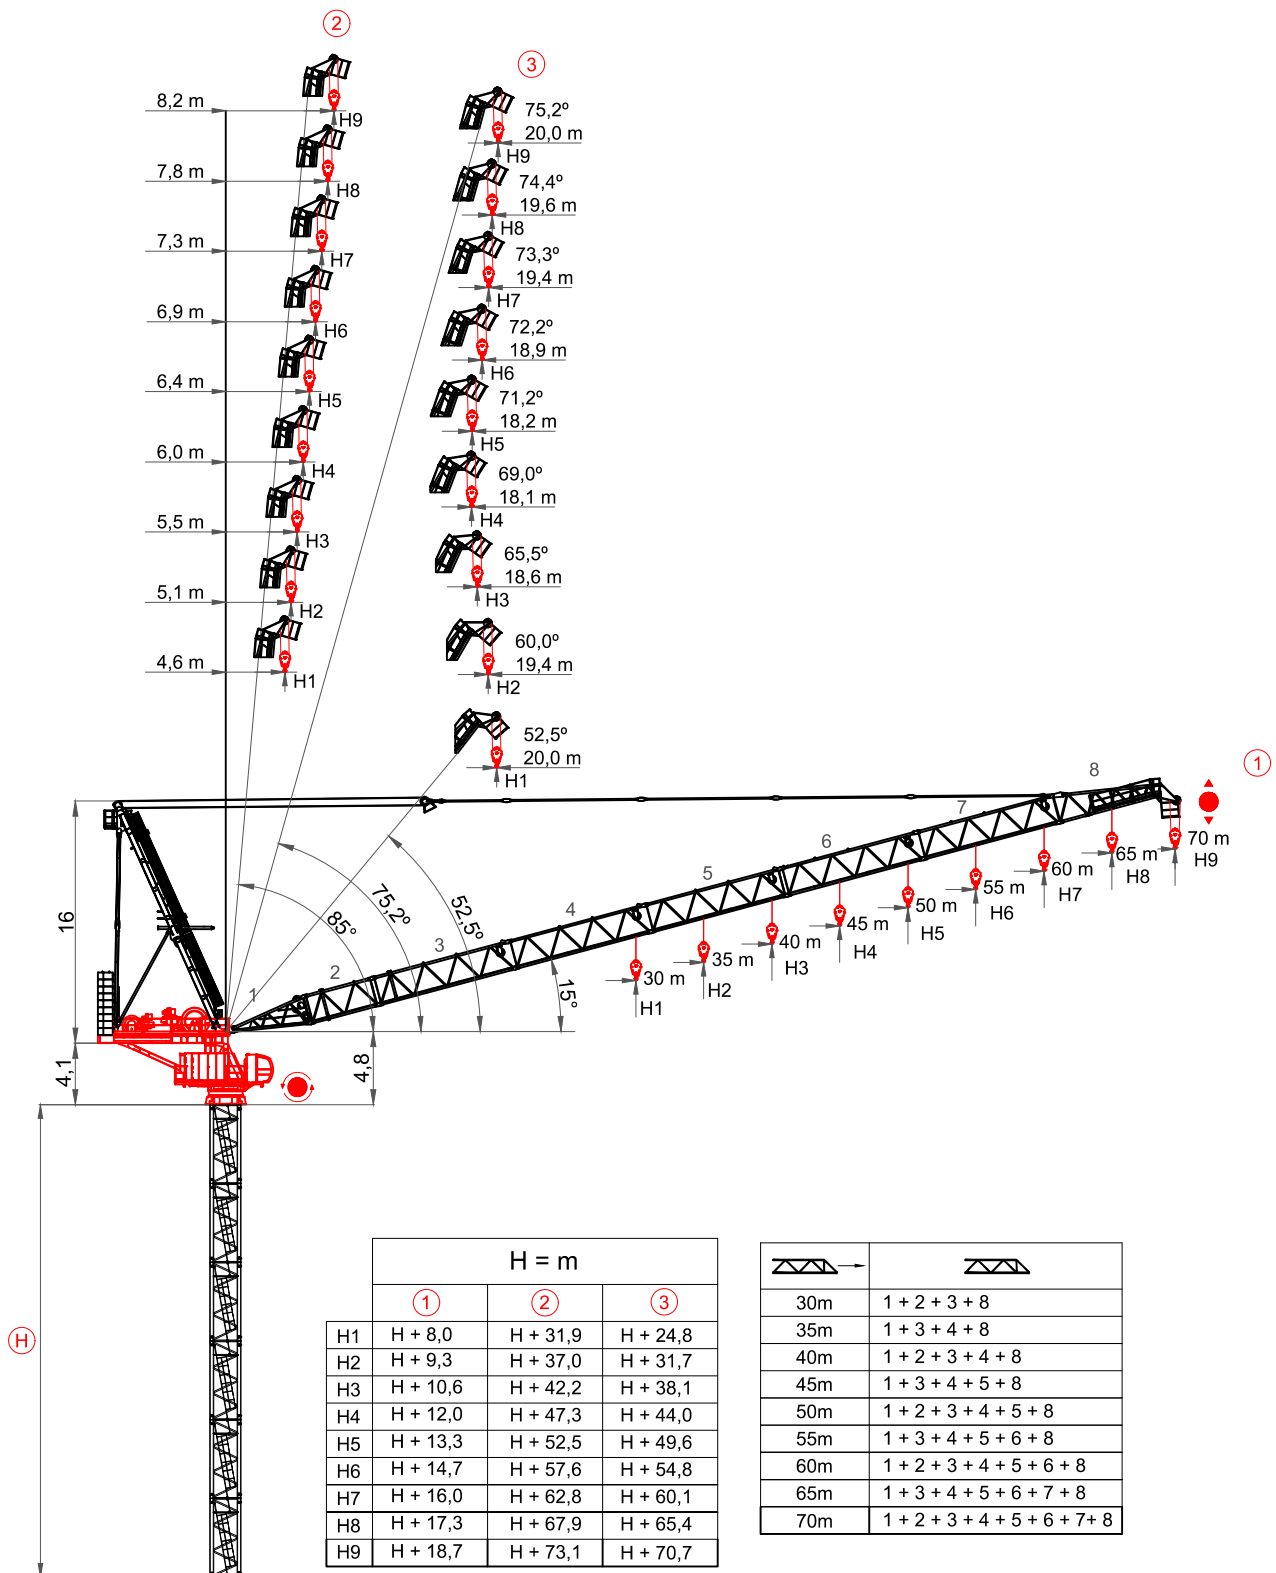


B



C(i)

(i) Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage -
советоваться



- ① Pluma maxima - Portée maxi - Sbraccio massimo - Maximum jib - Max. Ausleger
- ② Pluma min. en servicio - Portée min. in service - Minimum jib (in service) - Sbraccio min. in servizio - Mindst. Ausleger in Betrieb
- ③ Pluma min. fuera de servicio - Portée min. hors service - Minimum jib (out of service) - Sbraccio min. fuori servizio - Mindst. Ausleger ausser Betrieb
- ⓗ Altura torre - Hauteur mat - Tower height - Altezza torre - Turmhohe

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico -
- График грузоподъёмности

70 m



SL

10	15	20	25	30	35	40	45	50	55	60	65	70	m
24000	24000	24000	19690	16280	13820	11970	10560	9425	8480	7700	7050	6500	Kg
10	15	22,5	25	30	35	40	45	50	55	60	65	70	m
24000	24000	24000	21500	17790	15110	13110	11570	10330	9305	8460	7740	7150	Kg

65 m



SL

10	15	20	25	30	35	40	45	50	55	60	65	m
24000	24000	24000	22925	18970	16100	13980	12325	11015	9920	9030	8300	Kg
10	15	20	26	30	35	40	45	50	55	60	65	m
24000	24000	24000	24000	20765	17630	15320	13520	12090	10895	9925	9130	Kg

60 m



SL

10	15	20	25	30	35	40	45	50	55	60	m
24000	24000	24000	24000	21980	18715	16265	14350	12825	11590	10600	Kg
10	15	20	25	30	35	40	44	50	55	60	m
24000	24000	24000	24000	24000	20520	17845	15760	14090	12740	11660	Kg

55 m



SL

10	15	20	25	30	35	40	45	50	55	m
24000	24000	24000	24000	24000	21295	18505	16355	14635	13300	Kg
10	15	20	25	34,1	35	40	45	50	55	m
24000	24000	24000	24000	24000	23370	20320	17970	16090	14630	Kg
10	15	20	25	30	35	40	45	50	55	m
48000	48000	38450	30480	25045	21230	18325	16085	14290	12900	Kg
10	17,6	20	25	29	35	40	45	50	55	m
48000	48000	41970	33300	27395	23250	20085	17650	15705	14190	Kg

50 m



SL

10	15	20	25	30	35	40	45	50	m
24000	24000	24000	24000	24000	22960	20010	17685	15900	Kg
10	15	20	25	30	36,7	40	45	50	m
24000	24000	24000	24000	24000	24000	21990	19440	17490	Kg
10	15	20	25	30	35	40	45	50	m
48000	48000	41320	32745	26940	22815	19755	17350	15500	Kg
10	18,9	20	25	30	35	40	45	50	m
48000	48000	45170	35830	29510	25015	21685	19060	17050	Kg

45 m



SL

10	15	20	25	30	35	40	45	m
24000	24000	24000	24000	24000	24000	22150	19700	Kg
10	15	20	25	30	35	40,5	45	m
24000	24000	24000	24000	24000	24000	24000	21670	Kg
10	15	20	25	30	35	40	45	m
48000	48000	45415	36045	29720	25190	21820	19300	Kg
10	15	20,7	25	30	35	40	45	m
48000	48000	48000	39500	32600	27660	23980	21230	Kg

40 m



SL

10	15	20	25	30	35	40	m
24000	24000	24000	24000	24000	24000	23100	Kg
10	15	20	25	30	35	40	m
24000	24000	24000	24000	24000	24000	24000	Kg
10	15	20	25	30	35	40	m
48000	48000	46900	37210	30675	26025	22700	Kg
10	15	21,4	25	30	35	40	m
48000	48000	48000	40815	33680	28600	24970	Kg

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico -
- График грузоподъёмности

35 m 	SL	10	15	18	25	30	35	m	
		24000	24000	24000	24000	24000	24000	Kg	
	SL	10	15	18	25	30	35	m	
		24000	24000	24000	24000	24000	24000	Kg	
	SL	10	15	20	25	30	35	m	
		36000	48000	46460	36850	30380	26000	Kg	
	SL	10	15	21,2	25	30	35	m	
		48000	48000	48000	40460	33390	28600	Kg	

30 m 	SL	10	15	20	25	30	m	
		24000	24000	24000	24000	24000	Kg	
	SL	10	15	20	25	30	m	
		24000	24000	24000	24000	24000	Kg	
	SL	10	15	20	25	30	m	
		48000	48000	45920	36330	30200	Kg	
	SL	10	15	20,9	25	30	m	
		48000	48000	48000	39925	33200	Kg	

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

167Hp (123Kw) - INV							
LEBUS 780m		HBG 390m Ø26			HBG 260m Ø26		
	m/min	0-26	0-52	0-124	0-13	0-26	0-62
	Kg	24000	10000	3450	48000	20000	6900
	Kw	123	123	123	123	123	123

		1,8-2,8 min. de 15° a 85°		1,8-2,8 minutes from 15° to 85°	
	Kw	110			
	r.p.m.	0-0,72			
	Kw	2 x 21,1			
	m/min	(i)			
	Kw	(i)			

(i) Consultarnos-Consultateci-Consult us-Nous consulter-Auf anfrage-советоваться

167Hp (123Kw) - INV

		400 V 50 Hz I _{max.} = 485 A Fuse= 500 A	TOTAL POWER 315 KVA	GENERATOR 500 KVA	100m 6PX120+GND	150m 6PX120+GND	200m 6PX120+GND
2000/14/CEE 2005/88/CEE	2006/95 /CEE	* 480 V 60 Hz I _{max.} = 400 A Fuse = 500 A					

* Opcional / Optional / Opzionale

Elevación / Hoisting / Heben / Levage / Sollevamento

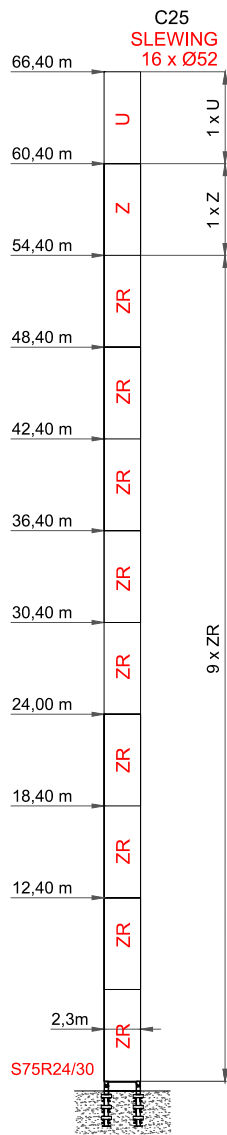
Elevación de pluma / Luffing / Ausleger-Einziehen / Relevage / Brandeggio

Orientación / Slewing / Schwenken / Orientation / Rotazione

Traslacion / Travelling / Schienenfahren / Translation / Traslazione

Cable / Rope / Seil / Câble / Fune

U = S2326 16/16 M52L
Z = S2330 16/24 M52L
ZR = S2330R 24/24 M52L
FA S75R-2430: ZR









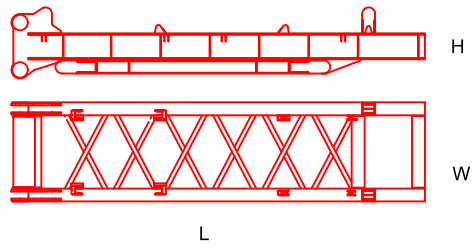


A








	max. H(m)
(m)	FEM 1005 C25
30	66,40
35	66,40
40	60,40
45	60,40
50	60,40
55	54,40
60	54,40
65	48,40
70	48,40



Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transports - dimensioni e trasporti - Размеры и транспорта

UPPER PART SL 830

	L(m)	W(m)	H(m)	Peso(Kg)
Pluma tramo primero / Jib heel section / Ausleger-Anlenkstück / Pied de fleche / Settore articolato di braccio / Корневая секция стрелы 	6,52	2,24	2,20	3085
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	5,43	2,16	2,33	2044
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	10,58	2,16	2,33	3707
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	10,58	2,16	2,33	3360
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	10,58	2,16	2,33	3186
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	10,58	2,16	2,22	2716
Elemento final de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	10,58	2,16	2,22	2530
Elemento final de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	9,30	2,16	2,27	3811
Contrapluma / Counter-jib / Gegenausleger / Contre-fleche / Controbraccio / Консоль противовеса 	9,60	2,31	1,54	10600

UPPER PART SL 830

		L(m)	W(m)	H(m)	Peso(Kg)
Unidad de rotacion / Complete slewing unit / Drehbühne / Orientation / Rotazione / Оголовок башни					
		H	Ⓐ	Ⓐ	3,15 2,55 2,64 16035
L	W				
		H	Ⓑ	Ⓑ	3,15 2,55 1,93 10710
L	W				
		H	Ⓒ	Ⓒ	3,15 2,55 0,71 5325
L	W				
Caballette de pluma / Jib gantry / Auslegerabspannbock / Chevalet de haubange de flèche / Tirante braccio / портал стрелы					
		H			3,10 2,16 2,43 4625
L	W				
Cabina y soporte / Cabin and platform / Kabine und wartungs / Cabine et support / Cabina e supporto / Кабина с основой					
		H			7,22 2,23 2,46 3035
L	W				
Caballette de contrapluma / Counterjib gantry / Gegenausleger abspannbock / Chevalet de haubange de Contre-flèche / Tirante controbraccio / встречная стрелка портала					
		H	Ⓐ	Ⓐ	11,00 2,30 1,48 11650
L	W				
		H	Ⓑ	Ⓑ	10,90 2,30 1,38 7800
L	W				
		H	Ⓒ	Ⓒ	7,74 2,30 0,765 3850
L	W				
Equipo de elevacion / Hoist winch / Heben / Levage / Sollevamento / подъёмник					
		H			3,60 2,58 1,93 10745
L	W				

		L(m)	W(m)	H(m)	Peso(Kg)	
Equipo de Pluma abatible / Luffing winch / Einziehwerk / Relevage / Brandeggio / Стрелоподъемный механизм						
		2,45	2,07	1,49	4650	
Gancho / Hook / Haken / Crochet / Gancio / крюк						
II PART LINE		0,73	0,40	1,53	900	
IV PART LINE		0,90	0,65	2,56	1900	
Elemento de torre / Tower section / Turmstück / Élément de mât / Elemento di torre / Башенные секции						
		U	3	2,31	2,34	4134
		U	6	2,31	2,34	6200
		U	12	2,31	2,34	11180
		Z	6	2,31	2,55	7825
		ZR	6	2,31	2,55	7925
		HM30/26	3	2,31	2,55	4300
		HM30/26	6	2,31	2,55	7825
		HM30/26	12	2,31	2,55	13000
		HM30	3	2,31	2,55	4300
		HM30	6	2,31	2,55	7825
		HM30	12	2,31	2,55	13000
		HM30R	6	2,31	2,55	7925
		HM30R	12	2,31	2,55	14000
		HM4029/30	12	2,91	2,94	20000
		HM4029	6	2,91	2,94	13000
Elemento de empotre / Foundation anchor / Fundamentanker / Pieds de scellement / El anegare / Анкерные крепления						
		S75R24/30	0,5	0,5	2,4	3600
		DIMA	2,31	2,34	0,8	1650
		HM30	0,5	0,5	2,4	2972
		HM30 R	0,5	0,5	3	3600
		HM4029	0,7	0,7	3	4600

		L(m)	W(m)	H(m)	Peso(Kg)						
Bloque de contrapeso / Counterweight blocks / Gegengewichtsblöcke / Bloc de contrepoids / Blocco di contrappeso / Плита противовеса		(A) H W L	A	5	1,1	0,51	8800				
Base C100R / base C100R / Hauptträger für fundamentkreuz C100R / Base C100R / Base C100R											
Bloque lastre de base / Base ballast block / Grundballastblöcke / Bloc de lest de base / Blocco di zavorra alla base		(A) H W	A	4,5	0,51	0,9	5000	5,8	0,4	1,5	8000
Bloque apoyo de base / Base support block / Grundballastblöcke / Bloc de appui de base / Blocco di appoggio alla base		L H W		2	0,5	2	5000				
Marco trepado externo / Tie-frame / Cadre d'encrage externe / Sopralzo con ancoraggio esterno / внешняя рамка пристежки		H W L		3,52	3,49	0,42	3900				

 Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - советоватьсь

x 11

