


永茂建机
YONGMAO

STL10160
400t

動臂系列

STL10160
400t

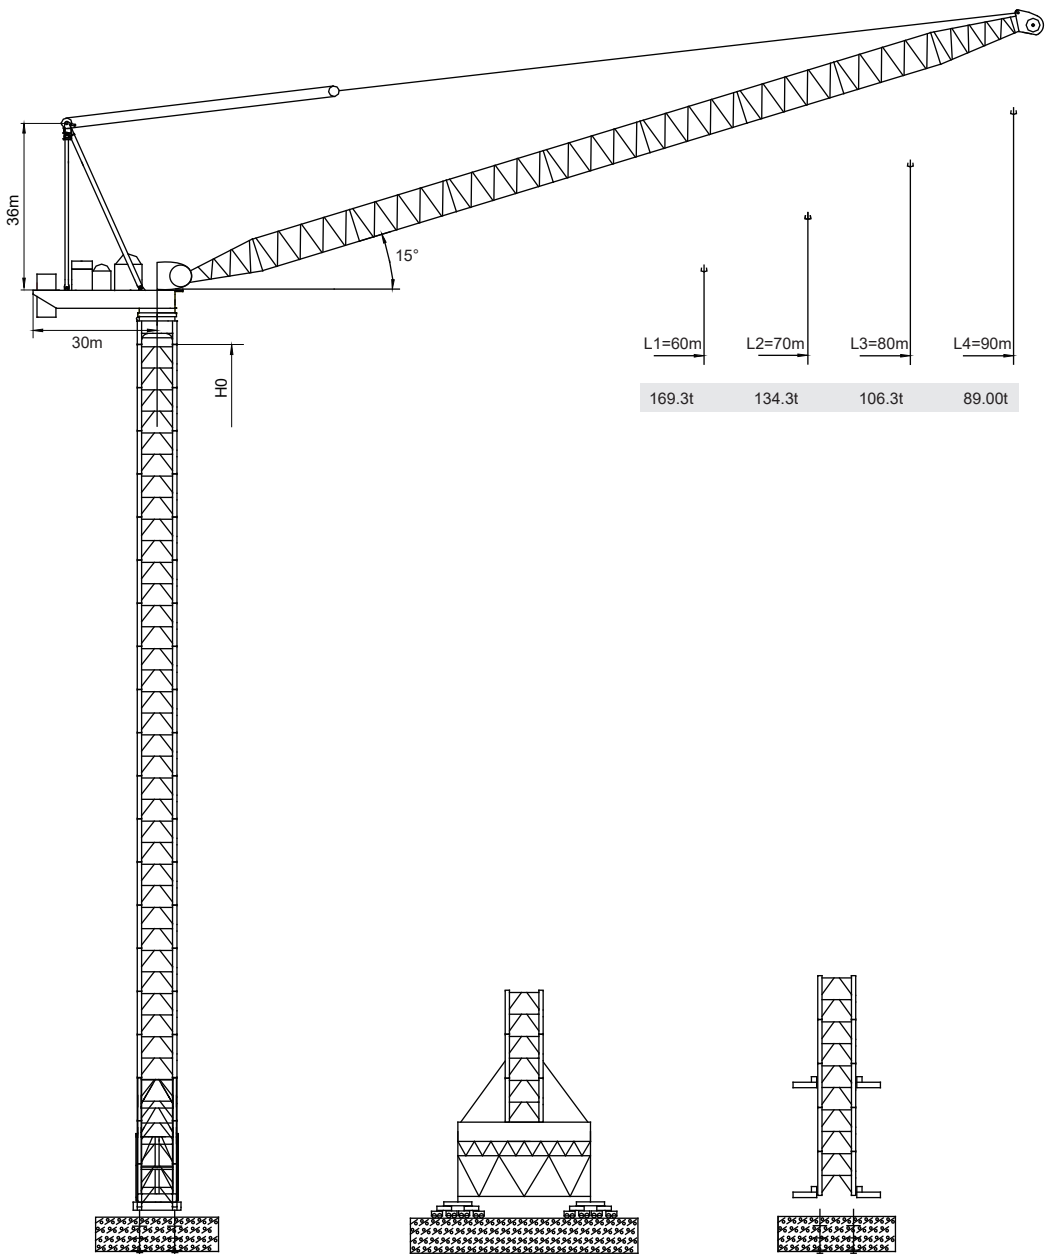


FEM

Luffing

V5.2-09112024

載荷表 Load Chart

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
90	☐	9.10~80.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	94.5	89.0
	☐☐	9.10~40.1	200.0	200.0	200.0	200.0	200.0	200.0	200.0	177.1	158.6	143.4	130.7	120.0	110.8	102.9	95.9	89.8	84.3
	☐☐☐	9.10~20.0	400.0	400.0	399.7	316.2	260.5	220.8	191.0	167.8	149.2	134.0	121.4	110.7	101.5	93.6	86.6	80.5	75.0
80	☐	8.40~80.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	☐☐	8.40~44.5	200.0	200.0	200.0	200.0	200.0	200.0	200.0	197.7	176.8	159.7	145.5	133.5	123.1	114.2	106.3	106.3	106.3
	☐☐☐	8.40~22.4	400.0	400.0	400.0	355.4	292.8	248.0	214.5	188.4	167.5	150.4	136.2	124.1	113.8	104.8	97.0	97.0	97.0
70	☐	7.70~70.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	☐☐	7.70~48.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	191.6	173.4	158.2	145.4	134.3	125.0	116.3	108.3	100.3
	☐☐☐	7.70~24.0	400.0	400.0	400.0	382.7	315.9	268.2	232.4	204.5	182.3	164.0	148.9	136.0	125.0	116.3	108.3	100.3	92.3
60	☐	7.00~60.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
	☐☐	7.00~50.5	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	184.2	169.3	154.4	140.5	127.6	115.7	103.8
	☐☐☐	7.00~24.3	400.0	400.0	400.0	389.1	323.6	276.9	241.8	214.5	192.7	174.9	160.0	146.1	132.2	119.3	107.4	96.5	85.6

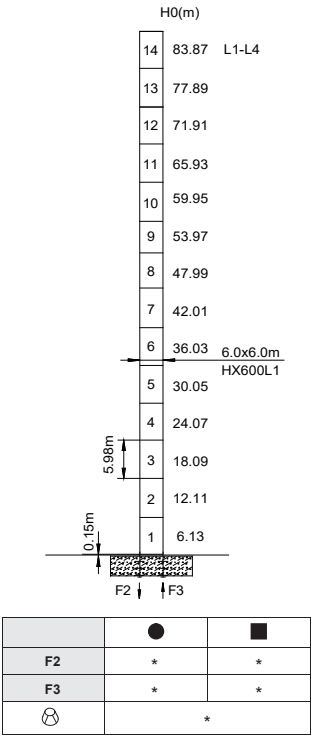

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
☐ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Luffing STL10160



YONGMAO HOLDINGS LIMITED




YONGMAO HOLDINGS LIMITED

Luffing STL10160

Luffing STL10160

STL10160
400t

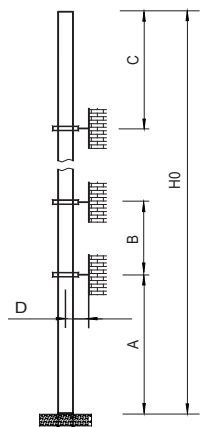


塔身節 Mast	臂長 Jib length	A (m)	B (m)	C (m)	D (m)	H0 (m)
HX600L1	90	*	*	*	*	*



附著道數 Number of tie collars=(H0-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

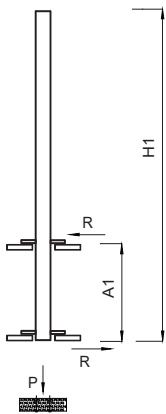

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening

塔身節 Mast	臂長 Jib length	H1 (m)	A1 (m)	P (t)	R (t)
HX600L1	90	*	*	*	*
		X (m)	Y (m)	L (m)	W (m)
		*	*	*	*

主要性能參數 Specifications

機 構 Mechanism									電動機 kW
		m/min	t	m/min	t	m/min	t		
	280LFV500B	0 – 22 0 – 48 0 – 96	100.0 40.0 12.0	0 – 11 0 – 24 0 – 48	200.0 80.0 24.0	0 – 6 0 – 12 0 – 24	400.0 160.0 48.0	2×900m	2×244
	280DFV500B	15 ° ~ 85 ° 4min							2×244
	24RFCV	0 -0.3 rpm							4×24
	/	/							/

電壓 Voltage	kW	
380V (± 10%) 50 Hz	1072	

* 與製造商聯繫 Contact us, please.
☆ 標準配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

動臂系列

STL10160
400t



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

Luffing STL10160

Luffing STL10160